



Screw Disconnect Terminal Blocks

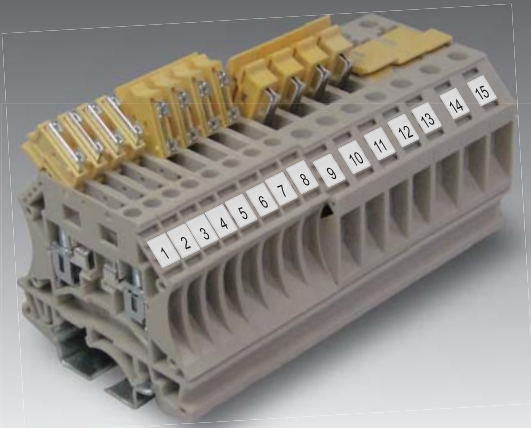

CTR 2.5



Features of Disconnect Terminal Blocks (CTR2.5/4/6/10)


- High current carrying capacity up to 15A .
- Space – saving design.
- Installing terminal plug easily and quickly on the terminal rails(Ease of circuit testing & diagnosis).
- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- An excellent vibration proof protection against loosening.
- Stable and low contact resistances.
- Easy mounting and dismantling from the terminal rail.

分離型接線座之特性 (CTR2.5/4/6/10)


- 高電流承載能力
- 節省空間之設計
- 端子插頭安裝及更換容易 (有利於測試及診斷)
- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
- 優良的抗震防鬆設計
- 低且穩定的接觸電阻
- 接線座從軌道上安裝及拆卸容易

Specifications (產品規格)	2.5 mm ²		
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		
UL	cUL ^{us} 600 V/12 A/AWG 12-22		
CSA	600 V/12 A/AWG 12-22		
IEC	500V/15A/0.5-2.5 mm ²		
Insulating impulse voltage withstand /Pollution degree (額定衝擊電壓 /污染等級)	6KV / 3		
Torque (lb-in) (扭緊力矩)	4.5		
Clamping Screw (M) (螺絲)	M3		
Insulation stripping length(mm) (剝線長度)	10-12 mm		
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)		
For TS35x7.5	5 x 60 x 47.5		
For TS35x15	5 x 60 x 55		
Accessories (附件)	Cat. No.	Qty.	
End Bracket (終端擋板)	SEW35	50	
	CEW35/2	50	
End Plate (擋板)	CEP 1	50	
Partition (擋板/隔片)	CEP 5	50	
Comb Link (邊接式聯接件)	CQB 2.5/2	50	
	CQB 2.5/3	50	
	CQB 2.5/10	20	
MarkingTags (標記號)	W5 W5Z W5K	500	
	W7 W7Z W7K	400	
Test plug (測試插頭)	TPS2.0 (Ø2)	20	
	TPS2.3 (Ø2.3)	20	
Socket (測試插孔)	TP2.0	50	
	TP2.3	50	
Diode Plug (二極體插頭)	+ ▷ -	CSD2.5	25
	- ▷ +	CSD2.5	25
LED Fuse Type (顯示型保險絲插座) Insert	+ ▷ -		
Protection Cover (防觸蓋)	DP1	20	
Retaining Plates (中界板)	AD1	50	
Tool (工具)	DS3		


CTR 4



CTR 6





CTR 10





Specifications (產品規格)	4 mm ²	6 mm ²	10 mm ²
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size	Rated voltage/Rated current/Wire size
UL	600 V/22 A/AWG 10-22	600 V/ 24A/AWG 8-22	600 V/ 40A/AWG 6-22
CSA	600 V/22 A/AWG 10-22	600 V/ 24A/AWG 8-22	600 V/ 40A/AWG 6-22
IEC	800 V/22 A/0.5-4mm ²	630V / 24A / 0.5-6mm ²	630 V/40 A/1.5-10mm ²
Insulating impulse voltage withstand /Pollution degree (額定衝擊電壓 /污染等級)	6KV / 3	8KV / 3	8KV / 3
Torque (lb-in) (扭緊力矩)	6	14	19
Clamping Screw (M) (螺絲)	M3	M4	M4
Insulation stripping length(mm) (剝線長度)	10-12 mm	12-14 mm	12-14 mm
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	6x 60 x 47.5	8 x 60 x 47.5	10x 60 x 47.5
For TS35x15	6 x 60 x 55	8 x 60 x 55	10 x 60 x 55
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50 CEW35/2 50	SEW35 50 CEW35/2 50	SEW35 50 CEW35/2 50
End Plate (擋板)	CEP 1 50	CEP 5 50	CEP 5 50
Partition (擋板/隔片)	CEP 5 50		
Comb Link (邊接式聯接件)	CQB 4/2 50	CQB 6/2 50	CQB 10/2 50
	CQB 4/3 50	CQB 6/3 50	CQB 10/3 50
	CQB 4/10 20	CQB 6/10 20	CQB 10/10 20
Marking Tags (標記號)	W6 W6Z W6K 500 W8 W8Z W8K 400	W6 W6Z W6K 500 W8 W8Z W8K 400	W6 W6Z W6K 500 W8 W8Z W8K 400
Test plug (測試插頭)	-	-	-
Socket (測試插孔)	-	-	-
Diode Plug (二極體插頭)	+ - CSD4 25	CSD6 25	CSD10 25
	- + CSD4 25	CSD6 25	CSD10 25
LED Fuse Type (顯示型保險絲插座) Insert	CSI4 25	CSI6 25	CSI10 25
Protection Cover (防觸蓋)	DP1 20	DP1 20	DP1 20
Retaining Plates (中界板)	AD1 50	AD1 50	AD1 50
Tool (工具)	DS3	DS4	DS4

CTR 4/4



CTR 10SF



Specifications (產品規格)	4 mm ²		
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		
UL	600 V / 12 A / AWG 10-22		
CSA	600 V / 12 A / AWG 10-22		
IEC	800 V / 32 A / 0.5-4mm ²		
Insulating impulse voltage withstand (額定衝擊電壓 / Pollution degree / 污染等級)	6KV / 3		
Torque (lb-in) (扭緊力矩)	7		
Clamping Screw (M) (螺絲)	M3		
Insulation stripping length(mm) (剝線長度)	9-10 mm		
Material/Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)		
For TS35x7.5	6 X 66 X 50.5		
For TS35x15	6 X 66 X 58		
Accessories (附件)	Cat. No.	Qty.	
End Bracket (終端擋板)	SEW35	50	
	CEW35/2	50	
End Plate (擋板)	CTR 4/4C	50	
Partition (擋板/隔片)	CEP 5	50	
Comb Link (邊接式聯接件)	CQB 4/2	50	
	CQB 4/3	50	
	CQB 4/10	20	
MarkingTags (標記號)	W6 W6Z W6K	500	
Test plug (測試插頭)	-	-	
Socket (測試插孔)	-	-	
Diode Plug (二極體插頭)	+ -	CSD4	25
	- +	CSD4	25
LED Fuse Type (顯示型保險絲插座) Insert	CSI4	25	
Protection Cover (防觸蓋)	DP1	20	
Retaining Plates (中界板)	AD1	50	
Tool (工具)	DS3	-	

Specifications (產品規格)	10 mm ²	
Technical Data (技術參數)	Rated voltage/Rated current/Wire size	
UL	600 V / 6.3 A / AWG 6-22	
CSA	600 V / 6.3 A / AWG 6-22	
IEC	660 V / 6.3 A / 1.5-10mm ²	
Insulating impulse voltage withstand (額定衝擊電壓 / Pollution degree / 污染等級)	8KV / 3	
Torque (lb-in) (扭緊力矩)	19	
Clamping Screw (M) (螺絲)	M4	
Insulation stripping length(mm) (剝線長度)	12-14 mm	
Material/Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	12 X 61.6 X 47.5	
For TS35x15	12 X 61.6 X 55	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
	CEW35/2	50
End Plate (擋板)	CTR 10SF-C	50
Partition (擋板/隔片)	CQV 10/2	50
	CQV 10/3	50
	CQV 10/4	20
Comb Link (邊接式聯接件)	CQB 10/2	50
	CQB 10/3	50
	CQB 10/10	20
MarkingTags (標記號)	-	-
Test plug (測試插頭)	-	-
Socket (測試插孔)	-	-
Tool (工具)	DS4	-